




# Beyem Blanco

Standard cement based tile adhesive for  
interior use

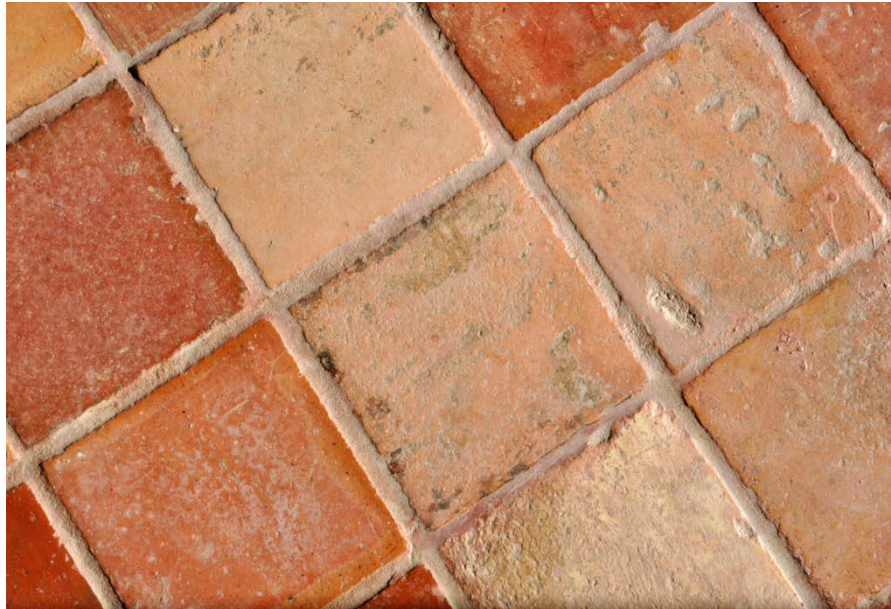

EN 12004-1

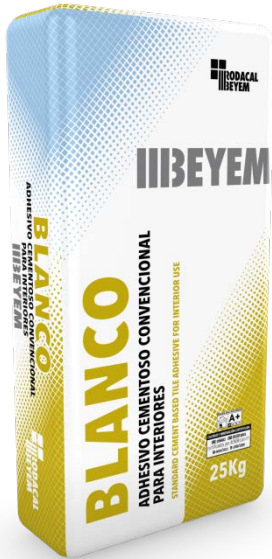

## About this product

BEYEM BLANCO is a standard cement based tile adhesive, formulated with white cement, selected aggregates and special additives to improve workability and adhesion.

## Benefits

- Great plasticity
- High water retentivity.
- High tensile adhesion strength and mechanical strength.
- Long open time. Allows adjustment of tiles.

## Use

Laying of ceramic tiles of medium/high absorption in interior walls and floors. Especially suitable for laying ceramic tiles of small and medium format and IIb / III group.

## Substrates

BEYEM BLANCO is suitable for:

- Cement based substrates.
- Cement based renders /plasters and screeds.
- Concrete floors.

## Preparation of substrates

Substrates must be clean, compact and free of substances that reduce adhesion such as dust, oil, grease and with no loose material. Uneven areas must be corrected with suitable smoothing and finishing products. Substrates must be free from any rising damp and have already completed the curing period of hygrometric shrinkage. Dampen substrates with water to cool down if they should be too warm, in case of wind or over absorbent substrates and wait until the thin layer of water disappears. Do not use on gypsum based plasters or paint.

## Instructions for use

Mix manually of mechanically BEYEM BLANCO with 5,0-6,0 l per bag of clean water until a homogeneous, creamy and lump-free paste is obtained. Let the mix stand for 5 minutes before application.

Small tiles must be fixed using a notched trowel of 6x6 mm. For tiles sizes greater than 400 cm<sup>2</sup>, a notched trowel 8x8 mm must be used. Spread the mixed product onto the substrate to a maximum surface area of 1 m<sup>2</sup> or no more than can be tiled within 20/30 minutes in normal conditions. Unfavorable environmental conditions (strong sunlight, drying wind, high temperature as well as a highly absorbent substrate), could drastically reduce this time to a few minutes. Bed the tiles firmly into the adhesive with a slight sliding and/or twisting action, to ensure a good contact and complete coverage.

It is good practice to lift an occasional tile after fixing, to verify that the required contact is being achieved. Back of the tile must be completely wet.

## Cautions and recommendations

- On gypsum substrates, apply BEYEM FIJADOR primer before, to avoid contact between gypsum and the cement of the adhesive, avoiding adverse reactions.
- Do not apply on plastic, metal or wood.
- Do not apply below 5°C or above 30°C.
- Do not apply when there is risk of frost, rain, strong wind or direct sunlight.
- Leave joints between tiles with a minimum width of 2 mm. Grout with BEYEM JUNTA UNIVERSAL/ BEYEM JUNTA EXTRAFINA.
- On floors with a surface area greater than 30 m<sup>2</sup>, it is recommended to leave separation or sealing joints filled with a deformable material.
- On interior floorings larger than 15 m<sup>2</sup>, it is advisable to keep a free perimeter expansion joint between the floor and the wall or pillar, hidden by a skirting board (of approximately 5 mm).

## Technical data

### Product identity. Properties of mixture and application data

Appearance	Powder
Color	White
Bulk density	≈ 1380 Kg/m <sup>3</sup>
Density of the mix	≈ 1700 Kg/m <sup>3</sup>
Grading	0-800 μm
Mixing water,%	± 22%
Pot life	≈ 2 h
Adjustability time	≥ 20 min
Grouting	≈ 24 h
Coverage	≥ 3 Kg/m <sup>2</sup>
Tariff code	3824.50.90.00
<b>Final performances</b>	
Type	Annex ZA EN 12004-1
Initial tensile adhesion strength	≥ 0,5 N/mm <sup>2</sup>
Tensile adhesion strength after water immersion	≥ 0,5 N/mm <sup>2</sup>

## Packaging

BEYEM BLANCO is packed 25 kg plastic lined paper bags.  
 Storage: when stored unopened in a cool dry place, shelf life is 12 months from date of manufacture.

## Cleaning tools

Tools can be cleaned easily with water before the product hardens. Hardened product can be removed only mechanically.

## Project specification

*Laying of ceramic tiles must be carried out with cement based adhesive compliant with EN 12004-1 – Annex ZA, such as Beyem Blanco manufactured by Rodacal Beyem company. The substrate must be compact, free from any flaky, loose parts and must be clean and cured, having already completed the shrinkage stage. Existing joints must be respected and elastic fractionizing and perimeter joints must be created. Ceramic tiles must be laid with joint-gap spacers with a width of \_\_\_ mm.*

## Health and Safety

For further and complete information about the safe use of our product please refer to our latest version of the Safety Data Sheet, which is available upon request.

Disposal of the product and packaging must be in accordance with current legislation. This is responsibility of the final product user.

## Certifications



ER-1089/1999



IDI-0004/2012



### Contact



[www.rodacal.com](http://www.rodacal.com)



[rodacal@rodacal.com](mailto:rodacal@rodacal.com)



967 44 00 18

### Note

#### Product for professional use

The above guidelines and information is accurate to the best of our knowledge and is offered in good faith. This information is true and accurate, but as conditions of use and any labour involved are beyond our control, the end user must satisfy himself by prior testing that the product is suitable for his specific application, and no responsibility can be accepted, or any warranty given by our Representatives, Agents or Distributors. End user should ensure that he has our latest literature, copy of which will be sent upon request.